

JUNJIN CONCRETE PUMP SERVICE INFORMATION



JSI - EN - 05 - 8C - 001		Date	Feb 1st, 2005
Total Pages	1	Present Page	1
Written by	IL KYU, AN	Approved by	IN JAE, HWANG
Subject	Water tank		

Water tank

Finishing the pumping work, water should be drained for sure in winter.
3 kinds of water tank are used.

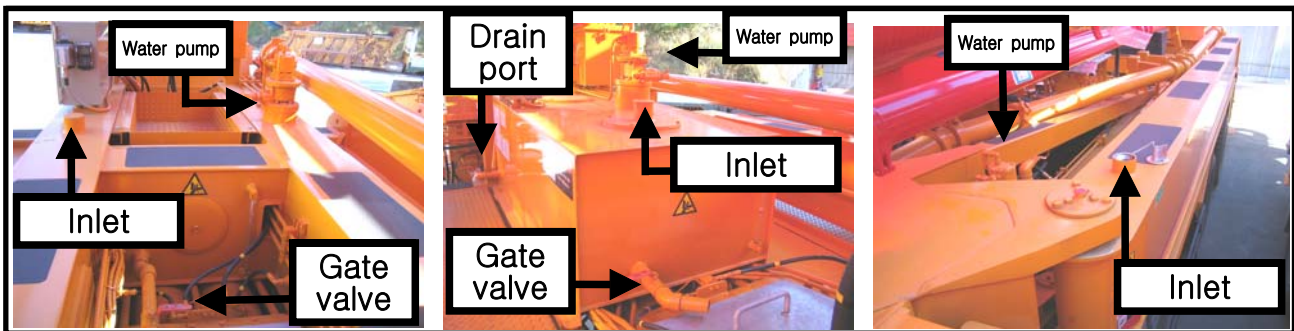


FIG.1 M33

FIG.2 M33, M37, M40

FIG.3 M42, M43, M50, M55

Water tank capacity

Model	Capacity(L)	Location
JX-H3315	600 L	Separate water tank on the concrete cylinder
	570 L	Chassis frame
JX-H3717	600 L	Separate water tank on the concrete cylinder
JX-H4170	500 L	Separate water tank on the concrete cylinder
JJ-H4315	600 L	Passenger side outrigger
JJ-H5015	600 L	Passenger side outrigger
JJ-M5717	600 L	Passenger side outrigger

Caution ① : Storing water in the tank for a long time, it might cause corrosion inside the tank.