


# JXZZ20-4.11HP

## DATA SHEET TRUCK MOUNTED BOOM PUMP



20M Truck Mounted Boom Pump with 110m<sup>3</sup>/h Output ZZ Type Boom Design

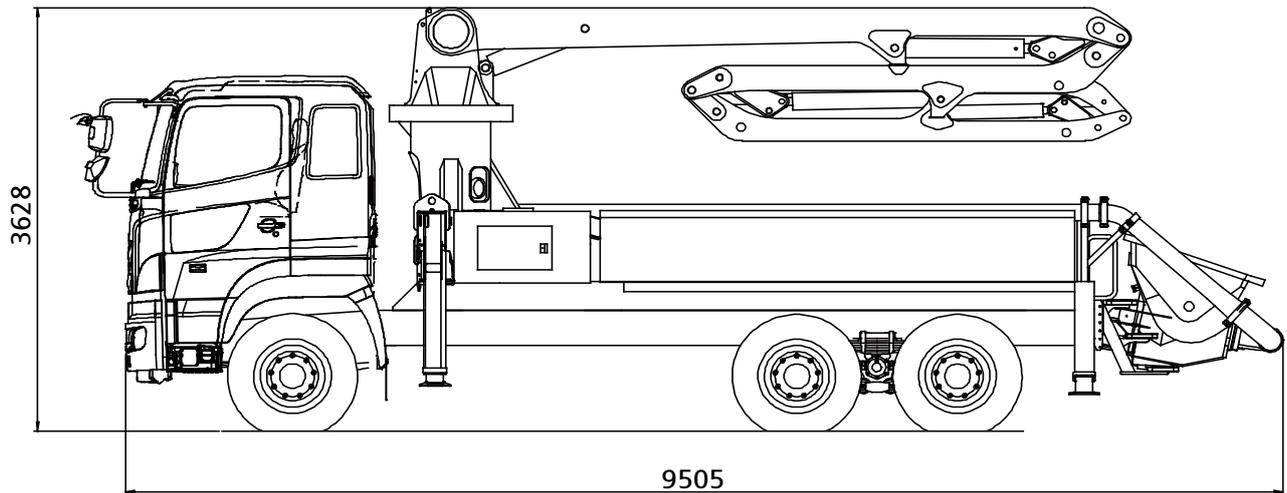

\* Remark : Standard specification with FUSO 6X4. Dimension depends on truck specification.

### TECHNICAL SPECIFICATION

GENERAL SPECIFICATION		PUMP SPECIFICATION			BOOM SPECIFICATION	
Delivery Line	DN 125 / 5"	Rod Side	Output	110 m <sup>3</sup> /h	Number of booms	4 Sections
Radio remote	Proportional control		Pressure	115 Bar	Folding Type	ZZ
Wear plate / Ring	Tungsten Carbide		Number Stroke	32 N	Vertical Height	20 m
Water Pump	20 Bar	Piston Side	Output	70 m <sup>3</sup> /h	Horizontal Reach	16.4 m
Water Tank	500 Liter		Pressure	170 Bar	Unfolding height	3.92 m
Auto Lubrication	Hyd. grease, Hopper		Number Stroke	22 N	End-Hose Length	3.0 m
		Delivery Cylinder (Hard-chromed)	Φ200 mm			
		Stroke Length	1700 mm			
		S-Valve	S2015			
		System Pressure	350 Bar			
		Switching Type	Hydraulic			
		Hopper Capacity	600 Liter			

\* All technical data are theoretical values and Specification are subject to change without prior notice.  
\* www.junjin.com


# JXZZ20-4.11HP

## DATA SHEET TRUCK MOUNTED BOOM PUMP




20M Truck Mounted Boom Pump with 110m<sup>3</sup>/h Output ZZ Type Boom Design


### BOOM WORKING DIAGRAM

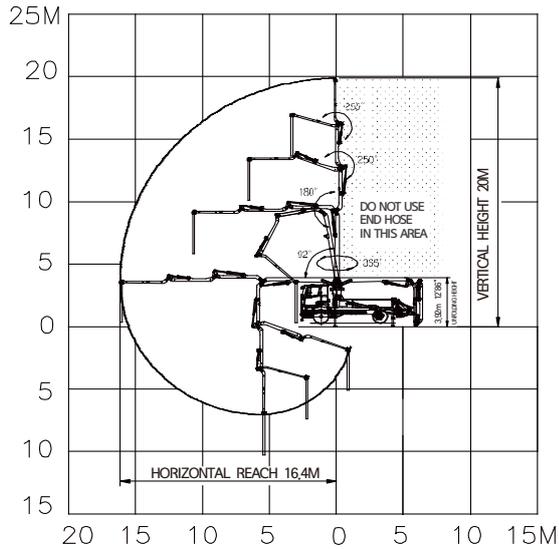

### OUTRIGGER SPAN

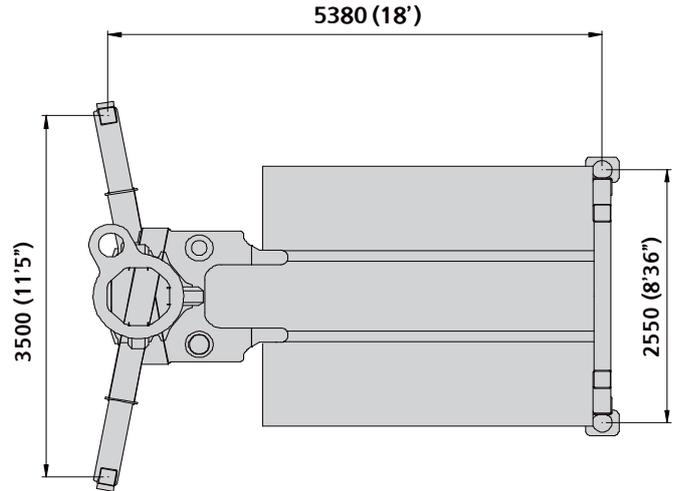

### WORKING POSITION

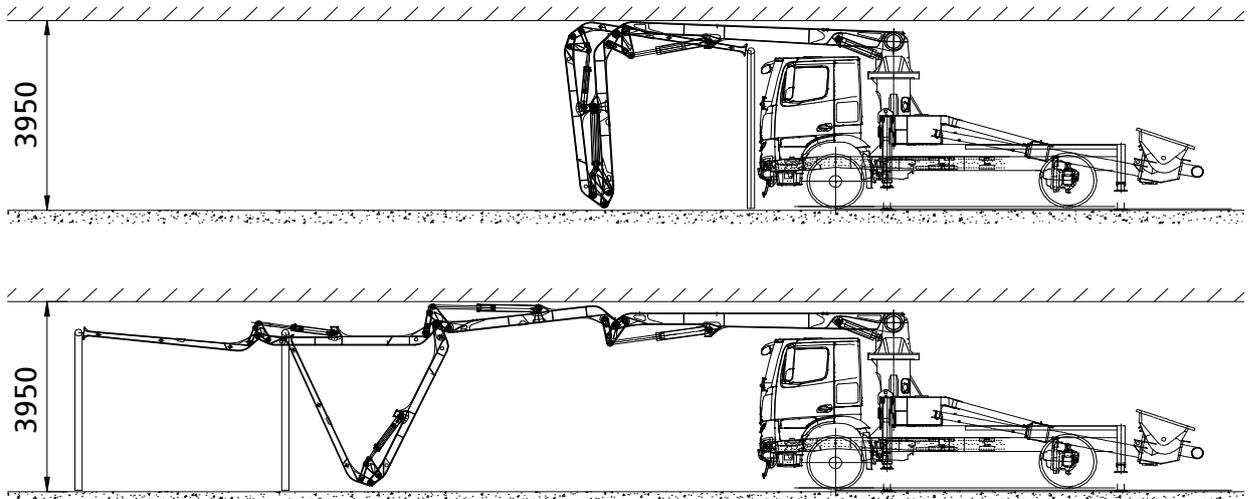

\* All technical data are theoretical values and Specification are subject to change without prior notice.  
\* [www.junjin.com](http://www.junjin.com)