


JXZZ20-4.12HP

DATA SHEET TRUCK MOUNTED BOOM PUMP



20M Truck Mounted Boom Pump with 120m³/h Output ZZ Type Boom Design

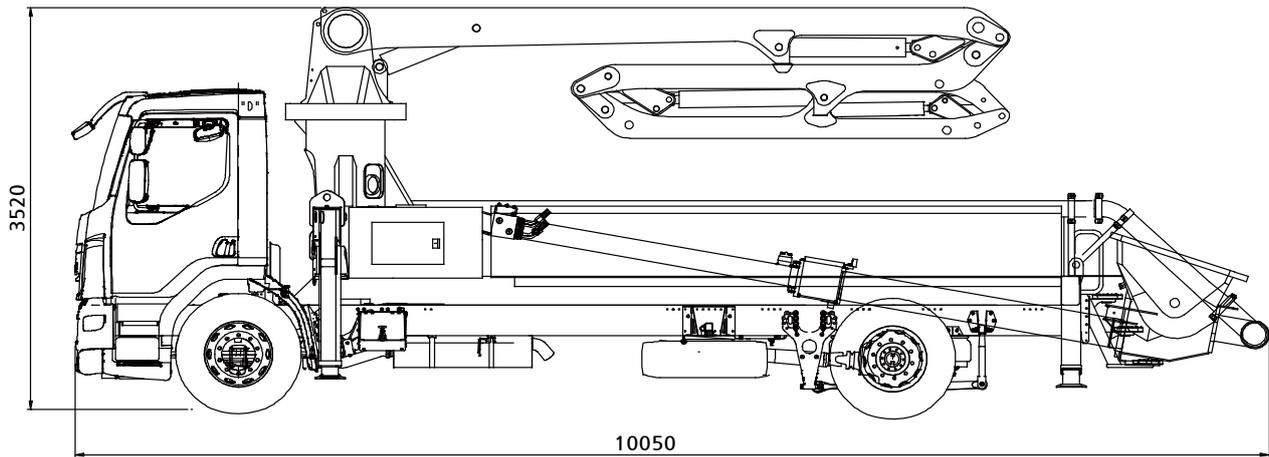

* Remark : Standard specification with DAF 4X2. Dimension depends on truck specification.

TECHNICAL SPECIFICATION

GENERAL SPECIFICATION		PUMP SPECIFICATION			BOOM SPECIFICATION	
Delivery Line	DN 125 / 5"	Rod Side	Output	120 m ³ /h	Number of booms	4 Sections
Radio remote	Proportional control		Pressure	127 Bar	Folding Type	ZZ
Wear plate / Ring	Tungsten Carbide		Number Stroke	30 N	Vertical Height	20 m
Water Pump	20 Bar	Piston Side	Output	70 m ³ /h	Horizontal Reach	16.4 m
Water Tank	500 Liter		Pressure	224 Bar	Unfolding height	3.92 m
Auto Lubrication	Hyd. grease, Hopper		Number Stroke	17 N	End-Hose Length	3.0 m
		Delivery Cylinder (Hard-chromed)	Φ200 mm			
		Stroke Length	2100 mm			
		S-Valve	S2015			
		System Pressure	350 Bar			
		Switching Type	Hydraulic			
		Hopper Capacity	600 Liter			

* All technical data are theoretical values and Specification are subject to change without prior notice.
* www.junjin.com


JXZZ20-4.12HP

DATA SHEET TRUCK MOUNTED BOOM PUMP




20M Truck Mounted Boom Pump with 120m³/h Output ZZ Type Boom Design


BOOM WORKING DIAGRAM

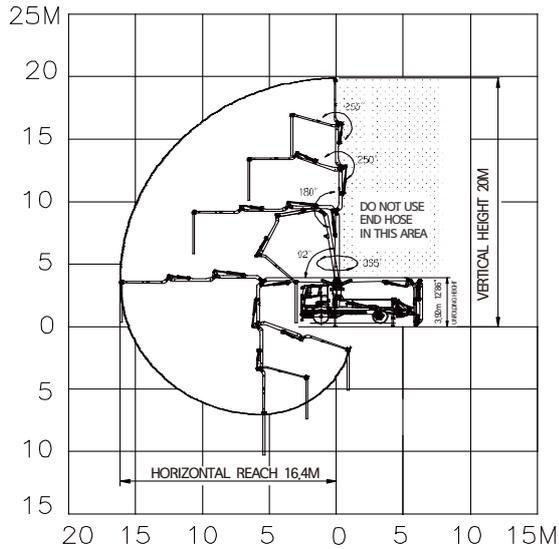

OUTRIGGER SPAN

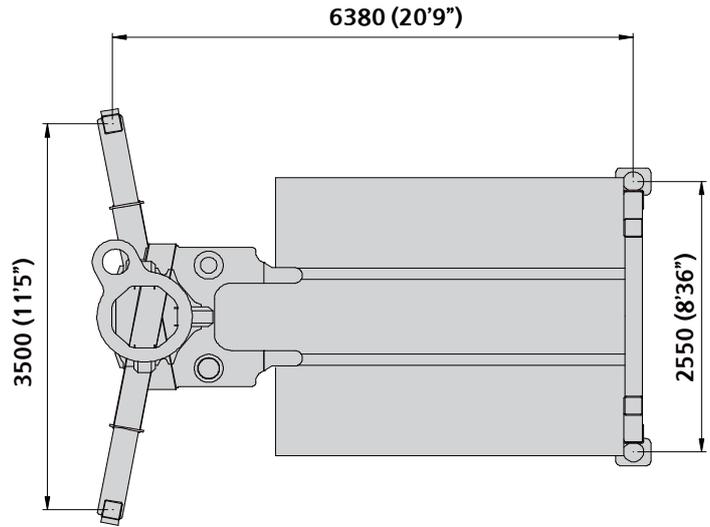

WORKING POSITION

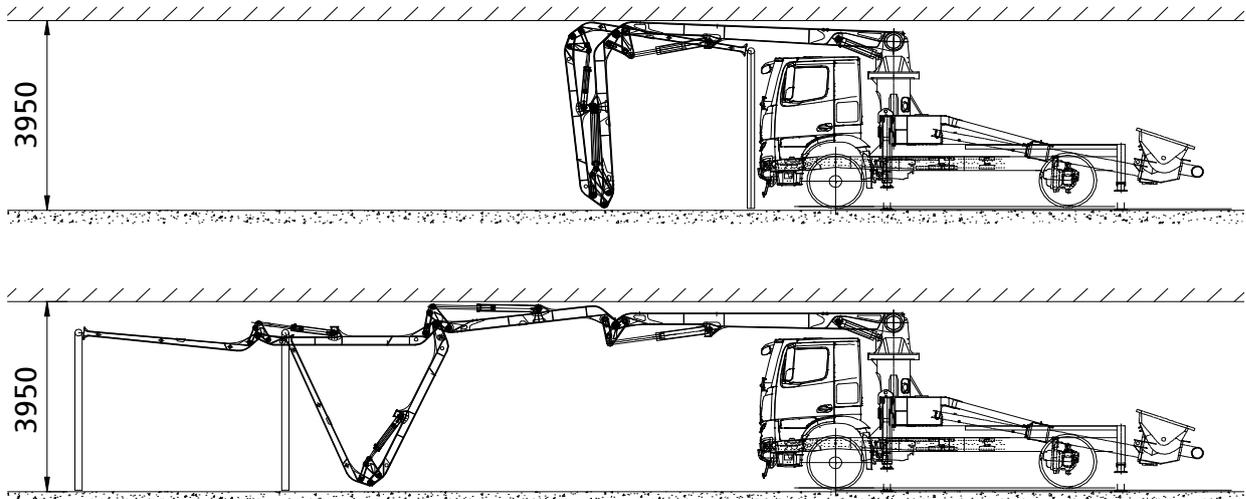

* All technical data are theoretical values and Specification are subject to change without prior notice.
* www.junjin.com